


Dintel Hebel

Ficha Técnica

Concreto Celular Autoclaveado

Dintel Hebel			Peso por Pieza ¹	
Espesor [cm]	Long	Claro Máximo	Peralte	
			25 cm	30 cm
	cm	Kg/m ²	Kg/pza	Kg/pza
10.0 ²	1.00	0.60	18.00	21.60
	1.35	0.95	24.30	29.16
	1.65	1.25	29.70	35.64
	2.00	1.50	36.00	43.20
12.5 ²	1.00	0.60	22.50	27.00
	1.35	0.95	30.38	36.45
	1.65	1.25	37.13	44.55
	2.00	1.50	45.00	54.00
15.0	1.00	0.60	27.00	32.40
	1.35	0.95	36.45	43.74
	1.65	1.25	44.55	53.46
	2.00	1.50	54.00	64.80
17.5	1.00	0.60	31.50	37.80
	1.35	0.95	42.53	51.03
	1.65	1.25	51.98	62.37
	2.00	1.50	63.00	75.60
20.0	1.00	0.60	36.00	43.20
	1.35	0.95	48.60	58.32
	1.65	1.25	59.40	71.28
	2.00	1.50	72.00	86.40
25.0	1.00	0.60	45.00	54.00
	1.35	0.95	60.75	72.90
	1.65	1.25	74.25	89.10
	2.00	1.50	90.00	108.00
30.0	1.00	0.60	54.00	64.80
	1.35	0.95	72.90	87.48
	1.65	1.25	89.10	106.92
	2.00	1.50	108.00	129.60

Nota: ¹Basado en Peso de Diseño. ²Dintel para muros no cargadores.

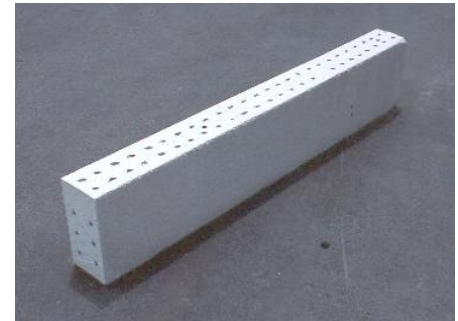

Longitud: 1.00, 1.35, 1.65, 2.00 m
Peralte: 20.0, 25.0 y 30.0 cm
Espesores: 10.0, 12.5, 15.0, 17.5, 20.0, 25.0 v 30.0 cm

Clase AAC-6
 Resistencia a la compresión = 61.2 kg/cm²
 Peso de Diseño = 720 kg/m³

